



LV104 Enclosure - Top View

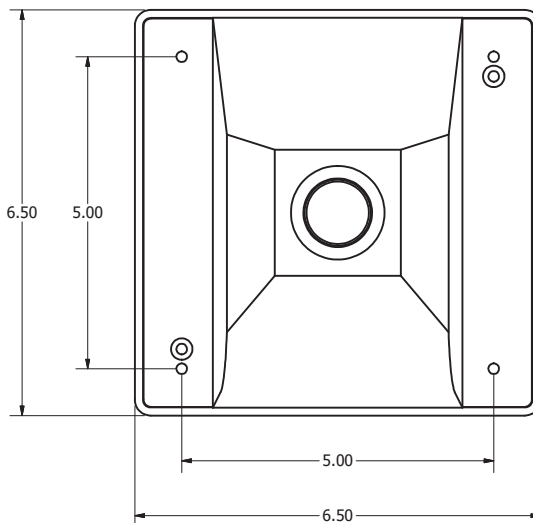


Camera Specifications - Axis M3014


Camera	
<b>Image sensor</b>	1/4" Progressive scan RGB CMOS 1 megapixel
<b>Lens</b>	2.8 mm, F2.0, fixed iris Horizontal angle of view: 80°
<b>Light sensitivity</b>	1-100000 lux, F2.0
<b>Shutter time</b>	1/25000 s to 1/6 s
Video	
<b>Video compression</b>	H.264 (MPEG-4 Part 10/AVC), Motion JPEG
<b>Resolutions</b>	1280x800 to 160x90
<b>Frame rate</b>	25 fps with power line frequency 50 Hz 30 fps with power line frequency 60 Hz
<b>Video streaming</b>	Multiple, individually configurable streams in H.264 and Motion JPEG Controllable frame rate and bandwidth, VBR/CBR H.264
<b>Pan/Tilt/Zoom</b>	Digital PTZ, Preset positions, Guard tour
<b>Image settings</b>	Compression, Color, Brightness, Sharpness, Contrast, White balance, Exposure control, Exposure zones, Backlight compensation, Fine tuning of behavior at low light, Rotation, Text and image overlay, Privacy mask, Mirroring of images

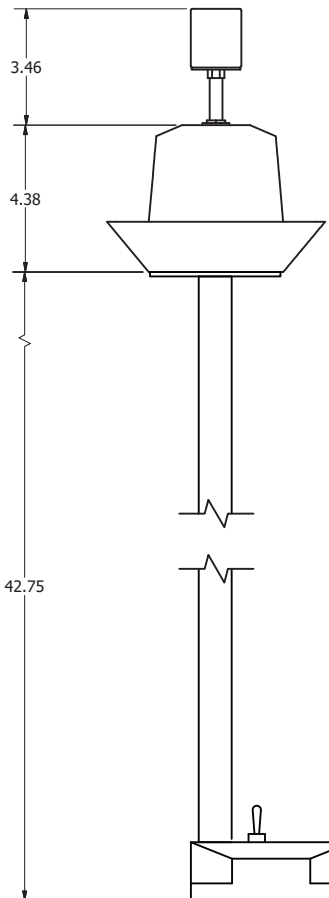


Shade Base Template

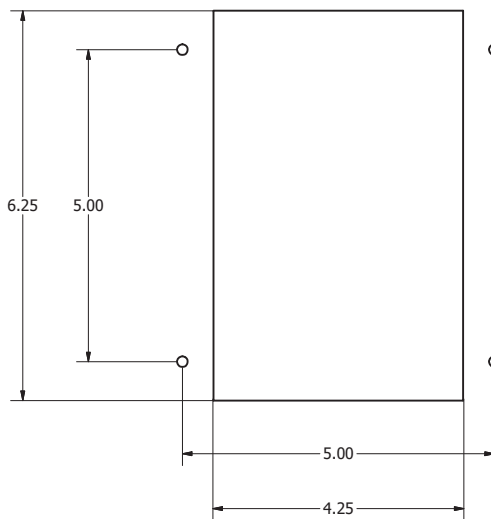

Base Bottom

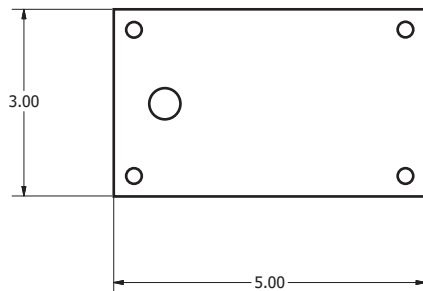


Part Number <b>LV104-M34-42F-W1</b>	Weight 5.28 lbs (2.39 kg)	 <a href="http://www.dsmlc.com">http://www.dsmlc.com</a> © 2011 Digital Site Management, L.L.C.
Description LV104 WiFi Encl, Axis M3014 Cam w/42" Round Pole		

# Specifications

## Netis WF-2403 300Mbps Wireless-N Router/AP



Wireless	
Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Signal Rate	Up to 300Mbps
Frequency Range	2.4-2.4835GHz
Transmit Power	20dBm(MAX)
Data Transfer Rate	802.11n: 40MHz (300Mbps, 270Mbps, 240Mbps, 180Mbps, 120Mbps, 90Mbps, 60Mbps, 30Mbps) 20MHz (144Mbps, 130Mbps, 115Mbps, 86Mbps, 57Mbps, 43Mbps, 28Mbps, 14Mbps) (Auto-Sense) 802.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps, 9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Mode	AP-Router, Client, AP
Wireless Security	64/128-bit WEP, WPA-PSK/WPA2-PSK (TKIP/AES) SSID Broadcast Enable/Disable Wireless MAC Filtering
Hardware	
Standards	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interface	1 * 10/100M Auto MDI/MDIX RJ45 port 1 * USB 2.0 port
LED	LINK/ACT, WPS, WLAN, SYS, PWR
Button	WPS, Default, Wireless Mode H/W Switch
Power Supply	DC 5V/100mA
Software	
WAN Type	DHCP(Dynamic IP), PPPoE, Static IP, WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/MAC/Domain filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade

Part Number	Weight	
LV104-M34-42F-W1	5.28 lbs (2.39 kg)	
Description	<a href="http://www.dsmlc.com">http://www.dsmlc.com</a> © 2011 Digital Site Management, L.L.C.	
LV104 WiFi Encl, Axis M3014 Cam w/42" Round Pole		